



snake 2010 H plus



Open outriggers



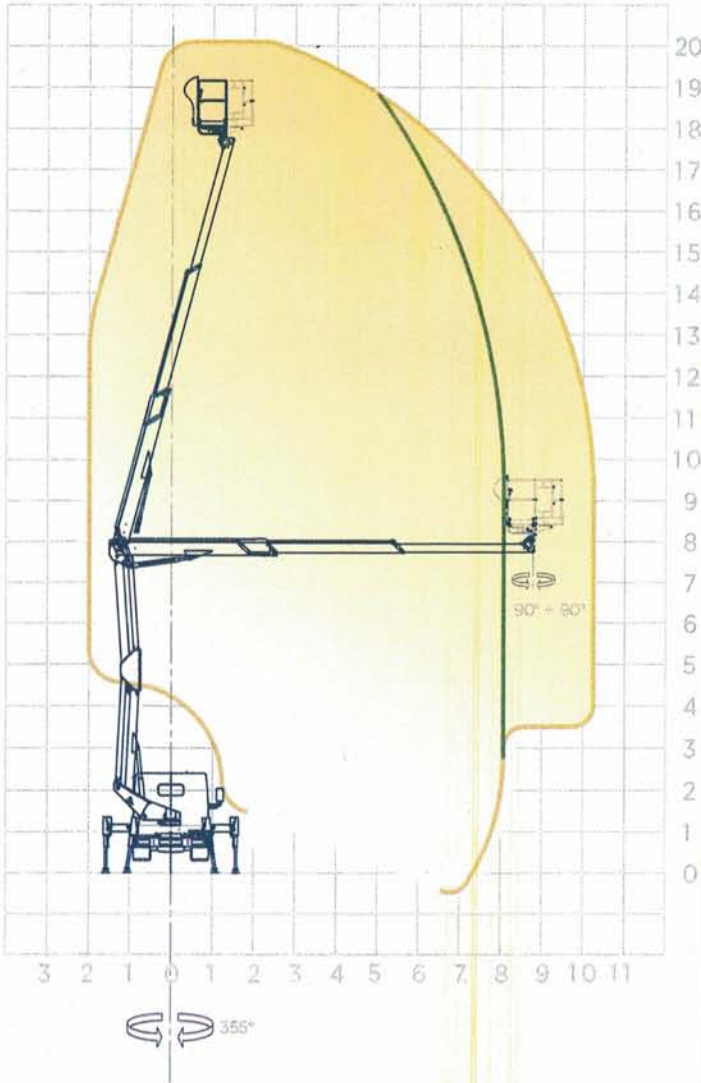

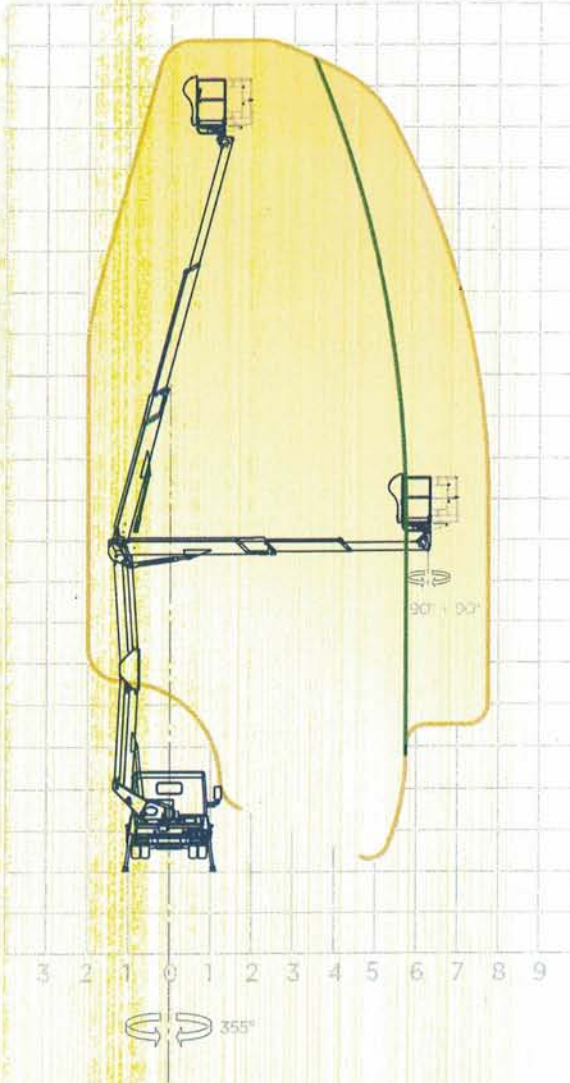



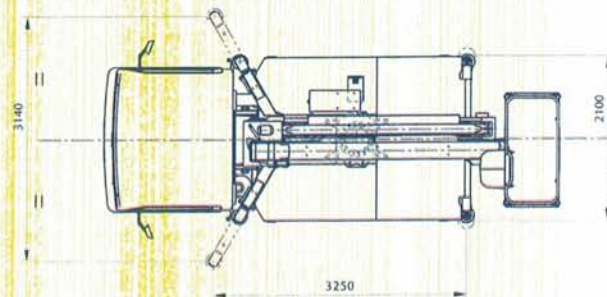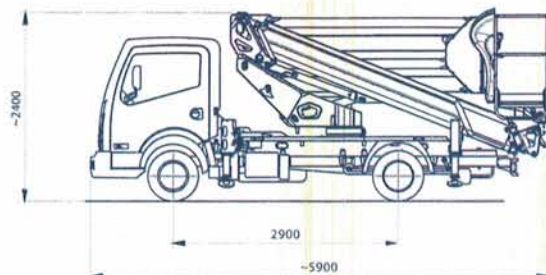







Closed outriggers



Preliminary



	20 m
	18 m
	10 m
	250 kg
	double bar, all steel barre double, en acier dopplebarren stahl dubbel gelaagd staal
	355°
	1400x700x h1100 mm aluminium 1400x700x h1100 mm aluminium 1400x700x h1100 mm alu 1400x700x h1100 mm aluminium
	90° right + 90° left 90° droite + 90° gauche 90° re + 90° li 90° rechts + 90° links
	RE proportional hydraulic type - REL version, electro-hydraulic controlled aerial part-hydraulic stabilization RE hydrauliques proportionnelles - REL parties aériennes électrohydrauliques - stabilisation hydraulique RE hydraulisch proportional - REL elektrohydraulisch gehobener Teil - hydraulische Stabilisierung RE porportioneel hydraulisch type - REL versie luchtdeel elektro-hydraulische bedieningen - hydraulische stabilisatie
	2400 mm
	5900 mm
	2100 mm
	type H type H type H type H
	3,5 t